




# AQUAVISION

## Technical Information

### Model AVF 17-3 LCD



#### Bezel size

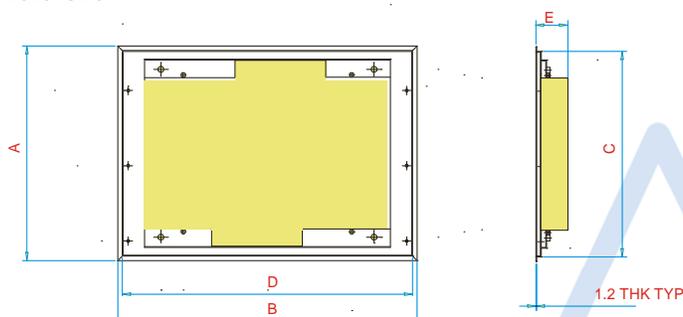

<u>Model</u>	<u>Screen Size</u>	<u>A</u> Overall Height	<u>B</u> Overall Width	<u>C</u> Cut out Height	<u>D</u> Cut out Width	<u>E</u> Max Depth
<b>AVF-17I-LCD</b>	<b>434mm</b>	<b>371mm</b>	<b>516mm</b>	<b>362mm</b>	<b>507mm</b>	<b>60mm</b>

#### Screen

LCD TFT  
WXGA 1366 x 768  
PAL/SECAM-B/G, D/K, L  
Full Auto Tuning  
TeleText/FastText  
Heated Screen

#### Inputs

1 x Scart (Fully Wired)  
1 x Composite AV (Yellow, Red and White)  
1 x S- Video  
1 x PC D- Connector + 3.5mm Audio  
1 x Analogue Tuner

#### Sound

Nicam Stereo  
2 x 10 Watts (PMPO)  
Graphic Equaliser

#### Power

Auto sensing 90-240VAC  
12 volts DC Transformer with 4m low voltage lead.  
Power Consumption 50W  
Standby Consumption <3w

#### Optional

Hard wired control panel with switch mimic connection.

#### Speaker details

